

**OUT**

ES1218RT

Rough terrain scissor lift

LIST OF STANDARD EQUIPMENT

- Automatic stabilizers to work at height
- Standard oscillating axle
- Automatic pothole protection system
- Crushing protection
- High ground clearance
- Self-locking door on the platform
- Speed limit at maximum height
- Platform load sense system
- Automatic braking system
- Manual emergency brake release
- Non-marking tyres
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Safety bracket for maintenance operations
- Horn
- Cylinder locking valve
- Emergency stop button
- Emergency lowering
- Traction engine protection
- Anchoring eyebolts
- Onboard diagnostics system
- Hour counter
- Proportional controls
- Fold-down guardrails
- Power to platform
- Explosion-proof tubing system
- Motion Alarm
- Integrated holes for fork transport
- Charging protection system
- Charging indicator
- Tie-down and lifting points
- One way platform extension deck
- Two-wheel drive
- Two-wheel steering

**LOGISTICS****CONSTRUCTION**

ES1218RT


Load capacity		454 kg
Load capacity on extended platform		136 kg
Max no. occupants		4
Working height	A	12 m
Platform floor height	B	10 m
Overall length (with outriggers)	C	3.84 m
Overall width	D	1.76 m
Overall height (rails up)	E	2.59 m
Transport height (rails down)	F	1.82 m
Platform size (length/width)		2.88x1.52 m
Platform extension size	G	1.43 m
Ground clearance		24 cm
Wheelbase	H	2.29 m
Turning radius (inside/outside)		2.15 m / 4.85 m
Engine		-
Drive motor		2x32 VAC / 3.3 kW
Lifting motor		48 V / 3.8kW
Travel speed (stowed)		6 km/h
Travel speed (raised)		0.45 km/h
Gradeability		40%
Maximum working slope		1.5°/3°
Batteries		48 V / 320 Ah
Integrated charger		48 V / 25 A
Hydraulic tank		71 l
Diesel tank		-
Tyres		26x12-16.5
Weight (with outriggers)		4,400 kg



Automatischen Stabilisatoren



On-board diagnostic system

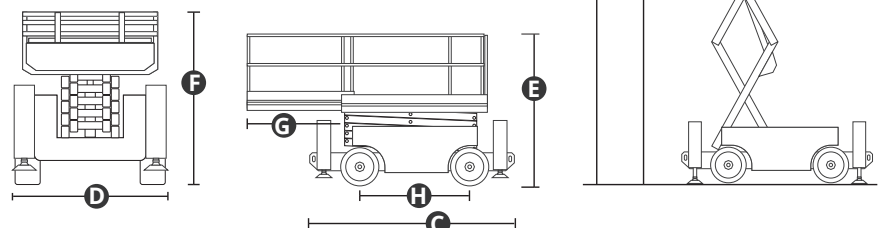

STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.