

**OUT**

ES1923RT

Rough terrain scissor lift**LIST OF STANDARD EQUIPMENT**

- Automatic stabilizers to work at height
- Standard oscillating axle
- Self-locking door on the platform
- Platform load sense system
- Automatic braking system
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Horn
- Emergency stop button
- Anchoring eyebolts
- Onboard diagnostics system
- Hour counter
- Proportional controls
- Fold-down guardrails
- Explosion-proof tubing system
- Motion Alarm
- Tie-down and lifting points
- Dual slide-out platform extension deck
- Four-wheel drive
- Four-wheel steering
- Self-weight lowering system
- Emergency pump
- Manual emergency brake release
- Hydraulic oil cooling system




**LOGISTICS****CONSTRUCTION**

ES1923RT

Load capacity		680 kg
Load capacity when extended		680 kg
Max no. Occupants (Indoor/outdoor)		4/4
Working height	A	19 m
Platform floor level height	B	17 m
Overall length	C	4.46 m
Overall width	D	2.29 m
Overall height (rails up)	E	3.60 m
Transport height (rails down)	F	2.75 m
Platform dimensions (length/width)		4.06 m x 2 m
Platform extension	G H	2 m
Ground clearance		0.40 m
Wheelbase	I	2.85 m
Turning radius (inside)		1 m
Turning radius (outside)		3.20 m
Driving motors		4 x 32VAC/3.3kW
Lifting motors		2x48VDC/8kW
Travel speed (stowed)		4.5 km/h
Travel speed (raised)		0.6 km/h
Batteries		48V/450Ah
Integrated battery charger		48V/60A
Gradeability		40%
Maximum working slope		X-2°/Y-3°
Non-marking tyres		33x12-20
Weight (CE)		10,870 kg



Automatic stabilizers

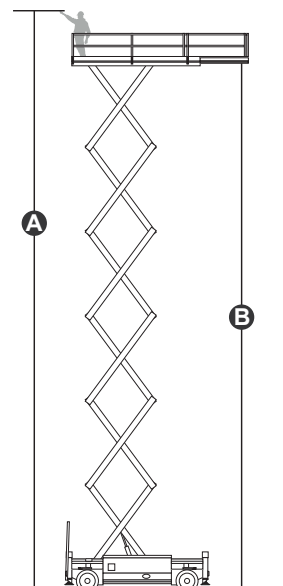

STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.