

**OUT**

ES2825RT

Rough terrain scissor lift

LIST OF STANDARD EQUIPMENT

- Automatic stabilizers to work at height
- Crushing protection
- Self-locking door on the platform
- Speed limit at maximum height
- Platform load sense system
- Automatic braking system
- Non-marking tyres
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Safety bracket for maintenance operations
- Horn
- Emergency stop button
- Emergency lowering
- Anchoring eyebolts
- Onboard diagnostics system
- Hour counter
- Proportional controls
- Fold-down guardrails
- Power to platform
- Lithium battery - Maintenance free
- Explosion-proof tubing system
- Motion Alarm
- Charging protection system
- Charging indicator
- Tie-down and lifting points
- Automatic one way platform extension deck
- Four-wheel drive
- Four-wheel steering
- Self-weight lowering system
- Emergency pump

**LOGISTICS****CONSTRUCTION**

ES2825RT




Load capacity		1,000 kg
Load capacity on extended platform		1,000 kg
Max no. occupants		4
Working height	A	28 m
Platform floor height	B	26 m
Overall length (with outriggers)	C	5.96 m
Overall width	D	2.50 m
Overall height (rails up)	E	4.13 m
Transport height (rails down)	F	3.19 m
Platform size (length/width)		5.48x2.45 m
Platform extension size	G	2.1 m
Ground clearance		23 cm
Wheelbase	H	4.10 m
Turning radius (inside/outside)		3.5/6 m
Engine		/
Drive motor		4x53VAC/2kW
Lifting motor		53VAC/28kW
Travel speed (stowed)		3.5 km/h
Travel speed (raised)		0.3 km/h
Gradeability		30%
Maximum working slope		2°/3°
Batteries		80V520Ah
Integrated charger		80V/80A
Hydraulic tank		/
Diesel tank		260 l
Tyres		355/55D625
Weight (with outriggers)		19,75 0kg



Automatic stabilizers



On-board diagnostic system

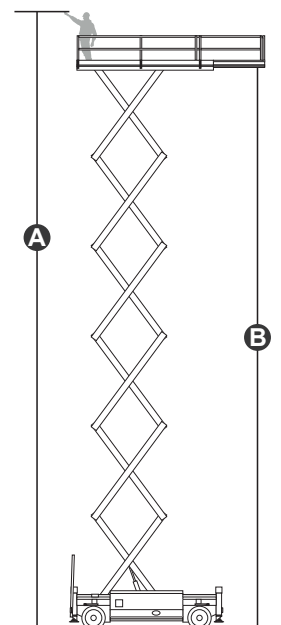

STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.