

**IN**

MJP070F

Vertical mast lift**LIST OF STANDARD EQUIPMENT**

- Proportional controls
- Pothole protection
- Self-locking door on the platform
- Permissible side-shift at maximum height
- Non-marking tyres
- Two-wheel drive
- Two-wheel steering
- Automatic braking system
- Emergency lowering
- Emergency stop button
- Onboard diagnostics system
- Tilt indicator with alarm
- Movement alarm sensor
- Horn
- Counter Hour
- Charger protection
- Platform load sense system
- Drive enable system
- Charging indicator
- Manual brake release
- Tie-down and lifting points
- One way platform extension deck
- Flashing LED light
- Integrated holes for fork transport




**LOGISTICS****CONSTRUCTION**

MJP070F

Load capacity		230 kg
Load capacity on extended platform		113 kg
Max no. occupants		1/0
Working height	A	6.70 m
Max platform height	B	4.70 m
Overall length	C	1.45 m
Overall width	D	0.76 m
Overall height	E	1.99 m
Platform size (length/width)		1.00 m x 0.76 m
Platform extension size		0.50 m
Ground clearance (stowed)		0.06 m
Ground clearance (raised)		0.014 m
Wheelbase	F	1.21 m
Turning radius (inside/outside)		0.60 m / 1.80 m
Drive motor		2x 24VAC / 0.5 kW
Lifting motor		24VDC / 2.2 kW
Travel speed (stowed)		3.6 km/h
Travel speed (rated)		0.50 km/h
Up\Down Speed		28 / 28 sec
Batteries		2x12 V / 115 Ah
Integrated charger		24 VDC / 15 A
Gradeability		25%
Maximum working slope (indoor use)		1,5° / 3°
Tyres		230x80 mm
Weight		990 kg



Non-marking solid tyres

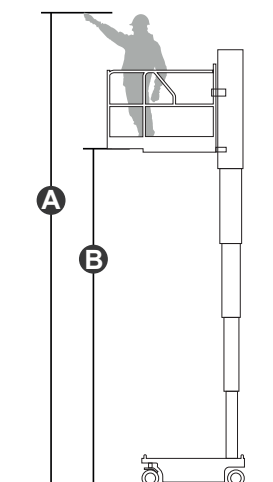

STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.